


E12 Extrusion

Slimline aluminium LED extrusion suitable for recessing and surface mounting, offered in 3 light output levels. The aluminium extrusion acts as a heat sink maximising performance and life of the LED strip, the extrusion can also be supplied in made to measure lengths. With a 6mm installation depth the extrusion is ideal for applications with a restricted height.

- 6mm installation height
- continuous uniform wide angle light
- Samsung or Cree single bin chip
- up to 1309 lm/m, efficacy 73 lm/w
- 4oz PCB for optimum heat distribution
- Phase, 1-10V or Dali Dimmable

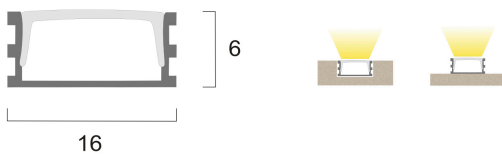

LED type	Samsung LM281B
Efficacy	Up to 73 lm/w
Luminaire luminous flux (LLF)	Up to 1309 lm/m
CRI (typical)	80+
Bin code	Single bin
LED lifetime	50,000hrs L70
Control Gear	Remote (included)

Power	Diffuser	CCT (°K)	LLF (lm)
5W/m	Opal	2700	402
		3000	438
		3500	439
		4000	459
10W/m		2700	772
		3000	842
		3500	843
		4000	898
15W/m		2700	1118
		3000	1219
		3500	1220
		4000	1309

LLF - Luminaire Luminous Flux

Product Variants: E12-

Example Code: E12-15W-O-40-RAL-1985-P

Power	Diffuser	CCT (°K)	Finish	Length	Driver
5W/m 5W	Opal O	2700 27	Ano Alu A	Enter Length L	Non Dim ND
10W/m 10W		3000 30	RAL RAL		1-10V T
15W/m 15W		3500 35			Dali D
		4000 40			Phase P

NB Compatibility of the phase dimmer and driver must be checked prior to order