


E13 Extrusion

Slimline trimmed aluminium LED extrusion suitable for recessing, offered in 3 light output levels. The aluminium extrusion acts as a heat sink maximising performance and life of the LED strip, the extrusion can also be supplied in made to measure lengths. With a 6mm installation depth the extrusion is ideal for applications with a restricted height.

- 6mm recess depth
- Samsung single bin chip
- Continuous uniform wide angle light
- Up to 1309 lm/m, efficacy 73 lm/w
- 4oz PCB for optimum heat distribution & longevity
- Phase, 1-10V or Dali Dimmable

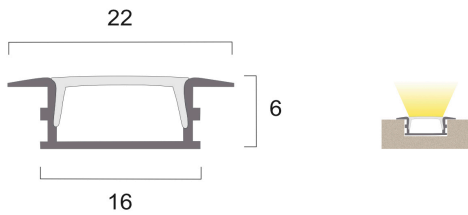

LED type	Samsung LM281B
Efficacy	Up to 73 lm/w
Luminaire luminous flux (LLF)	Up to 1309 lm/m
CRI (typical)	80+
Bin code	Single bin
Lumen maintenance	50,000hrs L70
Control	Remote (included)

Power	Diffuser	CCT (°K)	LLF (lm)
5W/m	Opal	2700	402
		3000	438
		3500	439
		4000	458
10W/m		2700	772
		3000	842
		3500	843
		4000	898
15W/m		2700	1118
		3000	1219
		3500	1220
		4000	1309

LLF - Luminaire Luminous Flux

Product Variants: E13-

Example Code: E13-15W-O-40-RAL-1985-P

Power	Diffuser	CCT (°K)	Finish	Length	Driver
5W/m 5W	Opal O	2700 27	Ano Alu A	Enter Length L	Non Dim ND
10W/m 10W		3000 30	RAL RAL		1-10V T
15W/m 15W		3500 35			Dali D
		4000 40			Phase P

NB Compatibility of the phase dimmer and driver must be checked prior to order